

NanoSpeed™ 1x2 Series Multi-Mode Fiber Optical Switch

(Protected by U.S. patent 7,403,677B1 and pending patents)

Product Description

The NanoSpeed™ series multi-mode 1x2 solid-state fiber (MMF) optic switch connects optical channels by redirecting an incoming optical signal into a selected output optical fiber. This is achieved using patent non-mechanical configurations with solid-state all-crystal designs, which eliminates the need for mechanical movement and organic materials. The NS fiber optic switch is designed to meet the most demanding switching requirements of ultra-high reliability, fast response time, and continuous switching operation. This series of switches are **bidirectional** intrinsically.

The NS Series switch is controlled by 5V TTL signals with a specially designed electronic driver having performance optimized for various repetition rate.

Features

- Solid-State
- High speed
- Ultra-high reliability
- Low insertion loss
- Compact

Performance Specifications

NanoSpeed MMF 1x2 Switch	Min	Typical	Max	Unit
Central wavelength ^[1]	630		2000	nm
Insertion Loss ^[2]		1.5	1.8	dB
Cross Talk ^[3]	15	18		dB
MDL		0.3		dB
IL Temperature Dependency		0.25	0.5	dB
Return Loss	20	25		dB
Response Time (Rise, Fall)			300	ns
Fiber Type	50/125, 62.5/125, or equivalent			
Driver Repeat Rate	100kHz driver	DC	100	kHz
	500kHz driver	DC	500	
Optic power handling ^[4]		0.5	2	W
Operating Temperature	-5		70	°C
Storage Temperature	-40		85	°C

[1] Operation bandwidth is +/- 25nm approximately at 1550nm.

[2] Measured without connector under source with CPR =13dB

[3] Cross talk is measured at 100kHz under source with CPR =13dB, which may be degraded at the high repeat rate.


[4] Defined at wavelength >1300nm. For the shorter wavelength, the handling power may be reduced, please contact us for more information.

Applications

- Optical protection
- Configurable operation
- Instrumentation

NanoSpeed™ 1x2 Series Multi-Mode Fiber Optical Switch

Mechanical Dimensions (mm)

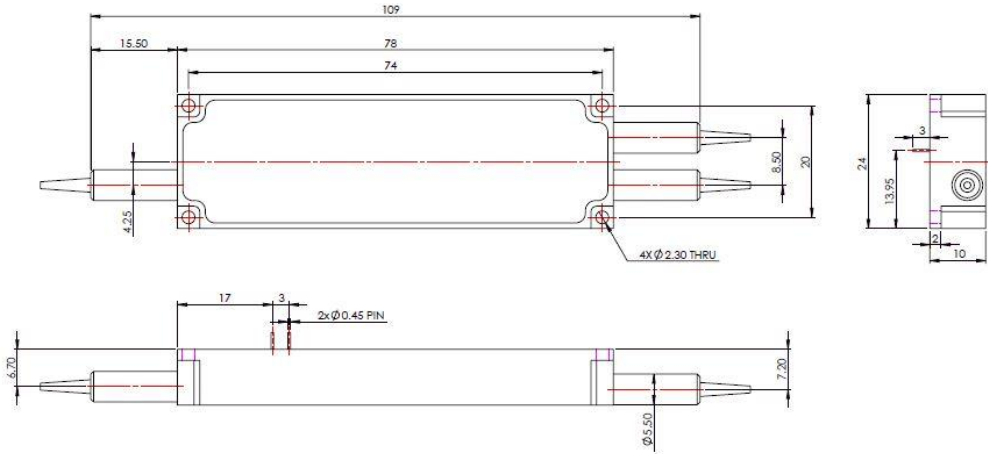

Optical Path Driving Table

Optical Path	TTL Signal
Port 1 → Port 2	L (< 0.8V)
Port 1 → Port 3	H (> 3.5V)


NanoSpeed™ 1x2 Series Multi-Mode Fiber Optical Switch

Driving Board Selection

Maximum Repetition Rate	Part Number (P/N)
100kHz	SWDR-11a261111
500kHz	SWDR-11a291111

* Note: For customers that prefer to design their own driving circuit, they are responsible for the optical performance. For more technical information, please contact us.

Speed and Repetition Measurement

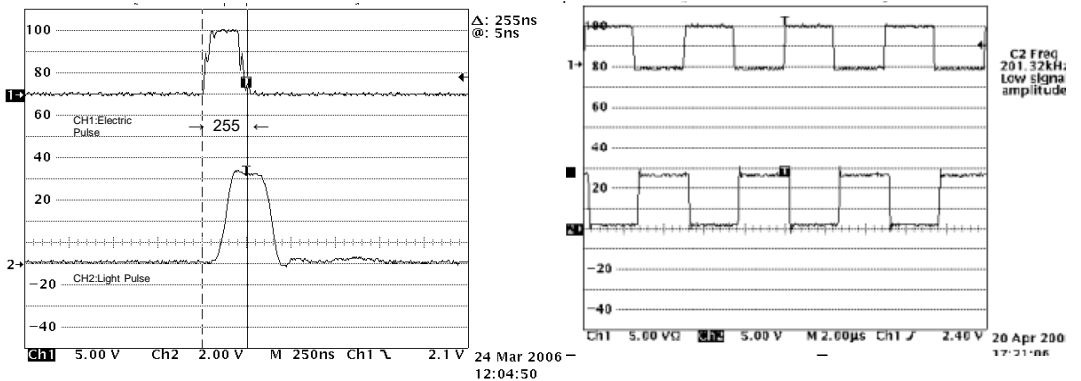

Ordering Information

NSMS -	<input checked="" type="checkbox"/> 1 2	<input type="checkbox"/>	<input checked="" type="checkbox"/> 1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Type	Wavelength	Configuration	Package	Fiber Type	Fiber Length	Connector [2]	
NSMS = Nanospeed MMF Switch	1x 2=12	1060nm=1 L Band=2 1310nm=3 1410nm=4 1550nm=5 660nm=6 850nm=8 Special=0	Single stage = 1	Standard = 1 Special = 0	50/125 MMF = 5 62.5/125 MMF = 6 Special=0	Bare fiber=1 900um loose tube=3 Special=0	0.25m=1 0.5m=2 1.0 m=3 Special=0	None=1 FC/PC=2 FC/APC= 3 SC/PC=4 SC/APC=5 ST/PC=6 LC/PC=7 Duplex LC=8 LC/APC=9 Special=0